

# aricell primary lithium cell

## 3.9V lithium sulfuryl chloride [Li-SO<sub>2</sub>Cl<sub>2</sub>]

### Low rate series SCL-D

#### Size D, Bobbin structure



#### Scope

Low rate series is a suitable solution for applications requiring small current for long-term back-up. This data sheet describes the mechanical design and electrical performance of the SCL-D of low rate series.

#### Electrical Characteristics



Nominal voltage [at +25°C]	3.93 V
Nominal capacity [at 1mA, +20°C, 2.0V cut off]	16 Ah
Maximum continuous current	230 mA
Pulse capability	400 mA
Storage [recommended]	+25 °C ±5 °C in dry condition
Operational temperature range	-40 °C ~ +85 °C

#### Physical Characteristics

Diameter [max]	33.6 mm
Height [max]	60.4 mm
Weight	98.0 g

Available terminations

STD, T1, T2, Wire, Connector

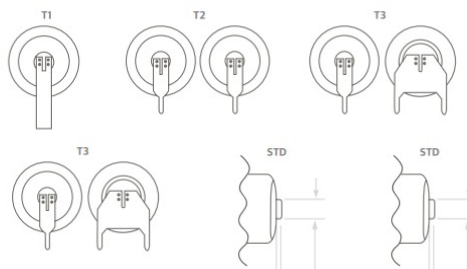

※ Customized battery pack: Since cell assembly requires a lot of experience and technical skills, we do not recommend end-user attempts to self-assembly without technical information. Please consult ARICELL.

#### Benefits

- High and stable operating voltage
- Superior shelf life  
→ Up to 15 years
- Wide operational temperature range  
→ -40°C / +85°C
- Low self-discharge rate  
→ Less than 1% per year at 20°C

#### Key features

- Bobbin structure
- 304L stainless steel container
- Hermetically glass to metal sealed
- Non-flammable electrolyte
- UL1642 certified [File no. MH 62104]
- Compliant with IEC60086-4
- UN DOT 38.3
- Made in South Korea




#### Typical applications

- AMR utility metering
- Medical equipment
- RFID device
- Military System
- Toll tag
- Asset tracking

#### Warning

• Fire, explosion and burn hazard.  
Do not recharge, short circuit, crush, disassemble, heat above 100°C(212°F), incinerate. Do not solder directly to the cell (use tabbed cell versions instead).

#### Performance

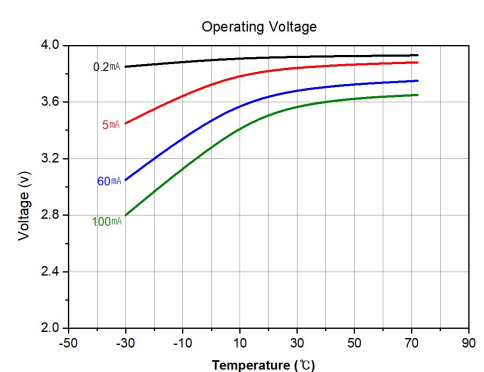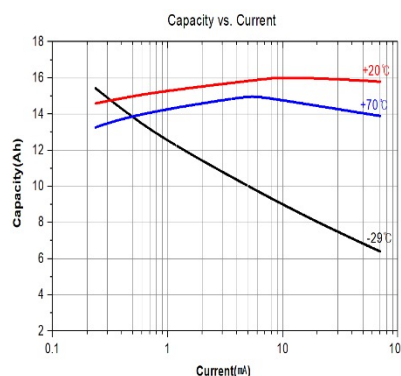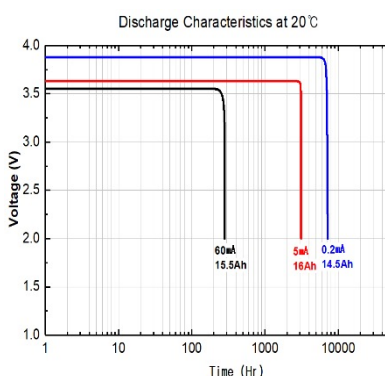

#### Headquarter & Factory

33, Jeongoksandan-12gil, Seoshin-myeon, Hwasung-si, Gyeonggi-do, Korea 18554

Tel. +82 31 5182 9814

Mail. info@aricell.co.kr  
Web. www.aricell.co.kr

#### Sales - Authorized Distributor USA

**Emerging Power, Inc.**  
200 Holt Street  
Hackensack, NJ 07601

Tel. +1 201.336.9711  
Web. www.emergingpower.com

※ Any values given here are for reference only. They also depend on actual conditions of use and does not guarantee future performance. Subject to change.

